


# TECHNICAL SPECIFICATIONS

## TEN BUTTON SWITCH PANEL

HM-2-5B, HM-2-5B/K2

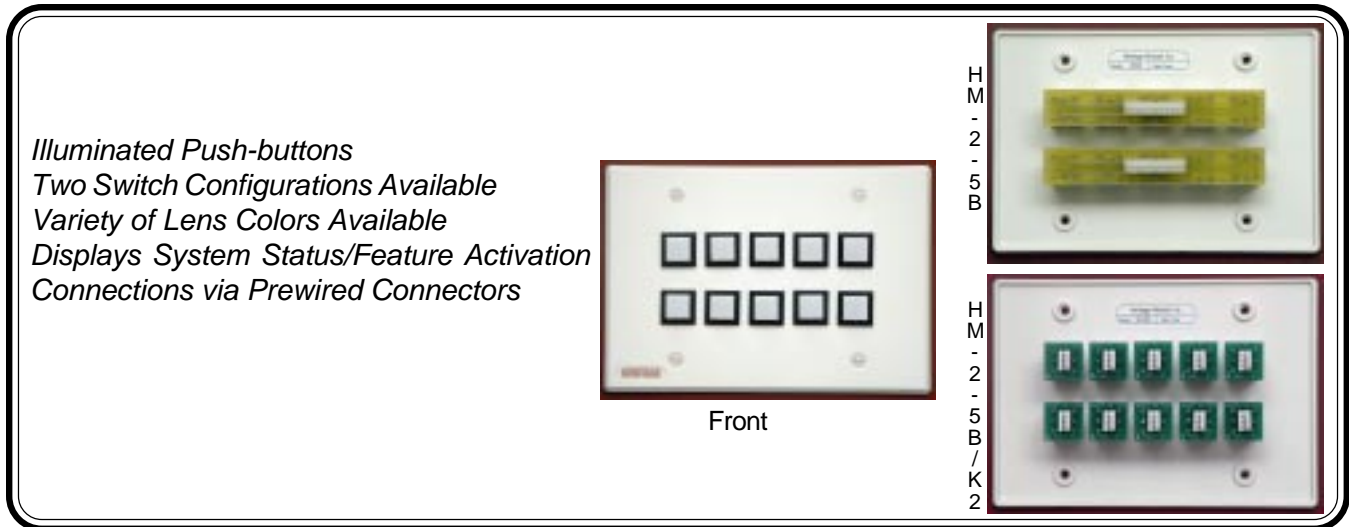

### DESCRIPTION

Wall recessed or surface mounted ten button switch panel with facilities for feature activation and/or system status display. Momentary or latching switches are available.

### CONTROLS AND INDICATORS

Ten combination push-button and lamp indicators. Standard lens color is white, others available separately include: red, amber, green, blue, yellow, clear, and black. Custom laminated labels are available for lenses. Lamps are rated 24 VDC at 40 mA. Lamps are front replaceable with rated average life of 6000 hours.

### SWITCHES

Switches are normally-open, single-pole / single throw. HM-2-5B is momentary operation, HM-2-5B/K2 is latching (push-on / push-off). All switches are rated 1A /125 VAC.

### INSTALLATION

Plugs into prewired connectors. HM-2-5B requires two HM-12P HM-2B/K2 requires ten HM-4P

### HOUSING AND FINISH

**Faceplate:** Flame retardant ABS plastic rated 94V-O by UL, finished in off-white and supplied with nylon mounting screws.

### DIMENSIONS

**Faceplate:** 6-3/8" (16.19cm) wide x 4-1/2" (11.43cm) high; **Backbox:** 5-3/4" (14.6cm) wide by 4" (10.16) high electrical backbox with three gang adapter for total depth of 3-5/16" (8.41cm), supplied by others.

### Heritage Medcall, Inc.

202 East Virginia Avenue, Tampa, FL 33603  
813-221-1000 (voice), 813-223-1405 (fax)  
www.heritagemedcall.com

01/04 HM2-5B Issue C  
Printed in U.S.A.

---

## ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

### MODEL HM-2-5B - HM2-5B/K2 TEN BUTTON SWITCH PANEL

The wall recessed or surface mounted HM-2-5B / HM-2-5B/K2 Ten Button Switch Panel shall be available for use as a system feature input device as well as a status indicator.

**Feature Input Device** - As a system feature input device, the push buttons shall be used for feature activation.

**Status Indication** - To provide status indication, the lamp indicators shall illuminate to show feature activation and/or overall system status.

The button panel shall be provided with ten combination push-button and lamp indicators. Lens colors shall be available (separately). Lamps shall be front replaceable with rated average life of 6000 hours.

The HM-2-5B shall contain ten momentary normally-open SPST switches; the HM-2-5B/K2 shall contain ten latching normally-open SPST switches.

The faceplate shall be flame retardant ABS plastic rated 94V-O by UL, finished in off-white and supplied with nylon mounting screws.

Faceplate shall mount to backbox with four 6-32 x 1" nylon screws provided.

Button panel shall install into a three gang box with a three gang adapter for surface or wall flush mounting. The dimensions shall be: **Faceplate** - 6-3/8" (16.19cm) wide x 4-1/2" (11.43cm) high; **Backbox**: 5-3/4" (14.6cm) wide by 4" (10.16cm) high electrical backbox with three gang adapter for total depth of 3-5/16" (8.41cm), supplied by others.