


HERITAGE MEDCALL TECHNICAL SPECIFICATIONS

Model HM-1210 Universal Transmitter

- 900 MHz Spread Spectrum
- Uses Standard NO/NC Contacts
- Non-volatile memory retains programming data
- Fully Supervised
- Case Tamper Protection

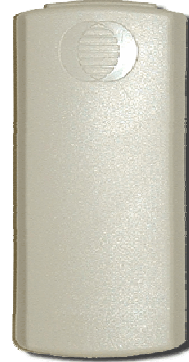

DESCRIPTION:

The HM-1210 Universal Transmitter provides a fully supervised reduced size transmitter for monitoring normally open or normally closed contacts. Tamper resistive case. Available in off-white.

MOUNTING:

Snap-in mounting bracket included for quick installation and removal.

DIMENSIONS:

3.5"W X 1.7"L X 0.9" D

POWER:

Includes 3.0V Lithium battery.
Average Battery Life 3 – 5 years.
Battery type: CR123A

SPECIFICATIONS:

External contacts: N/O or N/C
Operating environment: 32 to 140°F (0 to 60°C)

ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The universal transmitter shall be a HM-1210 supplied by Heritage MedCall. The universal transmitter shall be capable of communicating with the Sentry Freedom wireless repeater(s) and receiver. The universal transmitter shall supervise operation and report any troubles along with low battery warning to the Sentry Freedom software. The universal transmitter shall be capable of monitoring a normally open or normally closed contact. The universal transmitter shall include a snap-in mounting bracket for installation and a 3V lithium battery.